



COMMERCIAL HINGE RANGE

180° Glass to Glass Item No: **CFH180**



SPECIFICATIONS

Glass Sizes: 8–10 mm toughened glass only
Construction: Solid brass
Closing Type: Self-centering when within 15° of the closed position (see cut-out diagram)
Includes: Hinge, glazing gaskets, Allen head cover plate screws, and key
Use: Residential bathrooms and commercial hotel applications

FINISHES		
Chrome	CFH180-C	
Satin Chrome	CFH180-SC	
Black	CFH180-BK	
Brushed Brass	CFH180-BB	
Brushed Nickel	CFH180-BN	
Gunmetal	CFH180-GM	
Brushed Bronze	CFH180-BRZ	
Natural Brass	CFH180-NB	
Aged Brass	CFH180-AGB	
Brushed Copper	CFH180-BCO	
Black Chrome	CFH180-BC	
Gold Polish	CFH180-GP	
White	CFH180-W	

GLASS INSTRUCTIONS:

Only use toughened safety glass. To prevent damage to the hinge finish during installation, do not use power tools when installing these hinges.

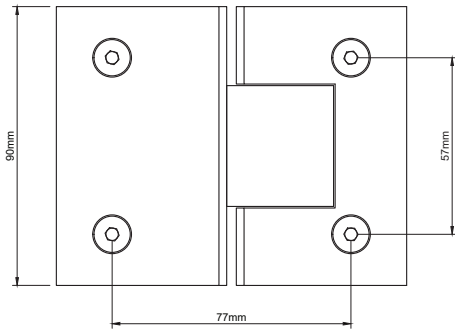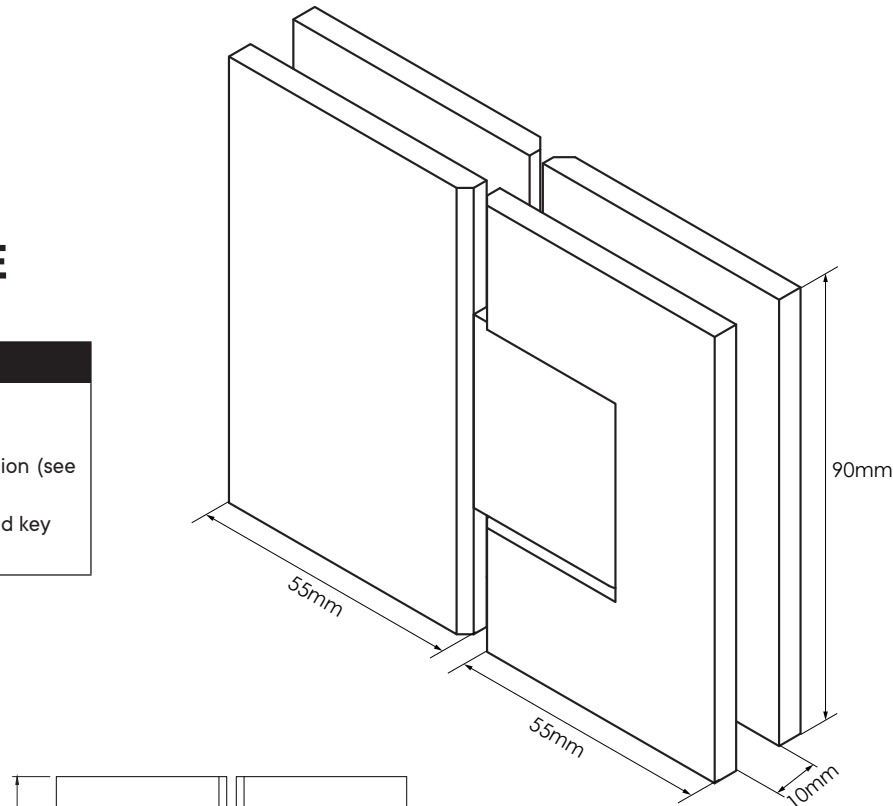

CARE & CLEANING GUIDELINES:

For best results, keep the following recommendations in mind when caring for your Opus shower door hardware. Your shower door should be dried daily with a soft towel or cloth to ensure its original finish. Do not use harsh cleaners or chemicals on the hardware, as many of the components are coated with a clear lacquer that will become damaged beyond repair. Always test your cleaning solution in an inconspicuous area prior to cleaning the entire hardware surface. Wipe surfaces clean using a soft, dampened cloth or sponge, and rinse completely with warm water immediately after applying the cleaning solution. Use only small amounts of a gentle liquid cleaner. Never use abrasive products, sponges, or wire scrub brushes while cleaning hardware.

GLASS CUT-OUT

TRADITIONAL RECTANGULAR CUT-OUT

EDGE OF GLASS

44mm

64mm

CUT OUT

10mm Diameter Holes

EDGE OF GLASS

NOTE:
Template is for standard 5mm glass to glass clearance

800mm MAX WIDTH

2 HINGES

MAX 35 KG

900mm MAX WIDTH

3 HINGES

MAX 50 KG