

FNZCX2W SPIDER

EUROGLASS RANGE | TWO WAY | WALL MOUNTED

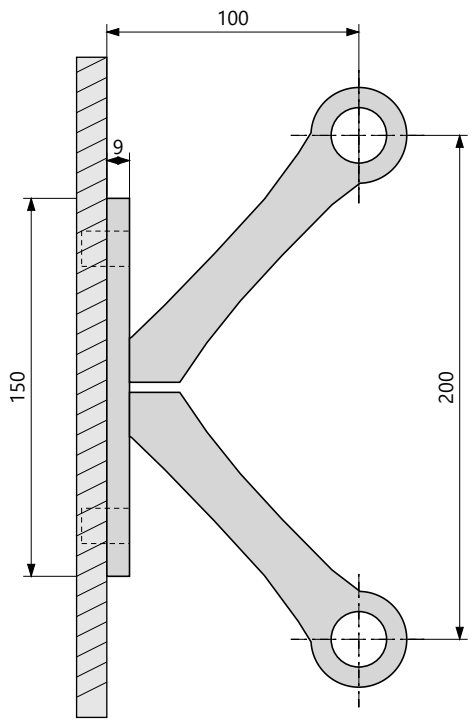

WALL

FRONT VIEW (FROM INSIDE)

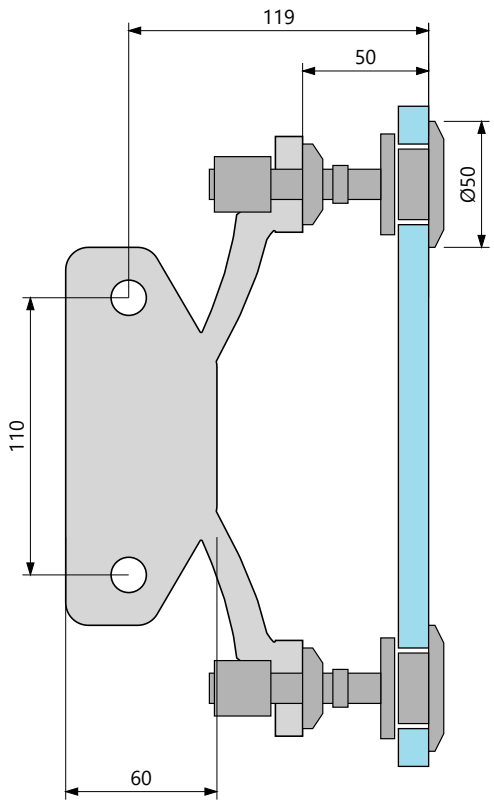


SIDE VIEW


119 = BOLT LINE TO OUTER GLASS FACE (109 / 101 TO THE INNER FACE FOR 10 / 17.5mm GLASS). 50 = ARM BOSS TO OUTER GLASS FACE

CXFHABM12 ARTICULATED ROTULE


SECTION | SCALE 1:1

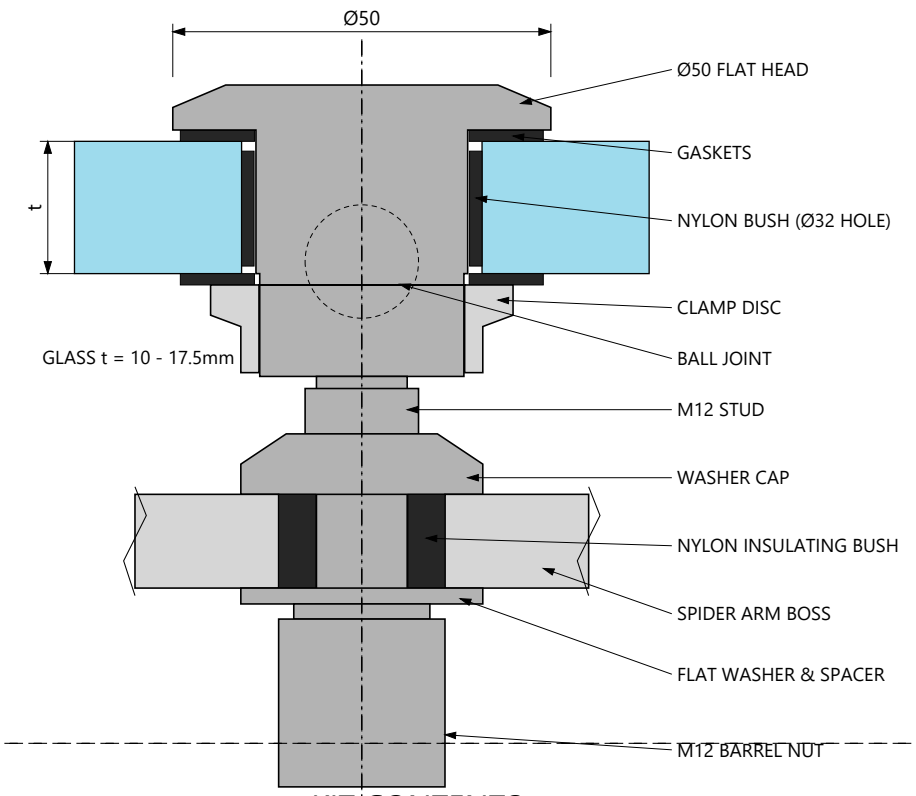

HOLE DETAILS FOR TOUGHENED GLASS:



FACADE GLASS



LAMINATED FACADE (Ø35 INNER PLY)

NOTE: HOLE DETAILS FOR TOUGHENED LAMINATED GLASS ARE PROJECT SPECIFIC.
CONTACT OPUS HARDWARE FOR DETAILS

WALL FIXING: 2 x Ø14 HOLES AT 110 CENTRES.
FIXINGS ARE PROJECT SPECIFIC AND SUPPLIED BY OTHERS

KIT CONTENTS:

- FNZCX2WSS KIT: 1 x FNZCX2WSS-C SPIDER + 2 x CXFHABM12SS ROTULES
- FNZCX2WSS-C: SPIDER CASTING ONLY

TECHNICAL DETAILS:

- 316 STAINLESS STEEL, SATIN FINISH
- ROTULE SUITS 10mm TO 17.5mm FACADE GLASS
- Ø32 FACADE GLASS HOLE (SEE HOLE DETAILS)
- WALL MOUNTED: FIXINGS BY OTHERS
- ROTULES 100 OUT FROM THE WALL FACE
- CLEARANCE RANGE: SOLD WHILE STOCKS LAST

THIS DOCUMENT IS THE PROPERTY OF OPUS HARDWARE. IT MUST NOT BE COPIED NOR THE CONTENTS PASSED ON TO ANY THIRD PARTY WITHOUT THE CONSENT OF THE COMPANY.

OPUS HARDWARE EUROGLASS RANGE
FNZCX2W TWO WAY WALL SPIDER

Sheet name:
FNZCX2WSS EUROGLASS SPIDER

Scale:	Dwg no:	Revision:
1:3 @ A3	FNZCX2WSS	A

www.opushardware.com